




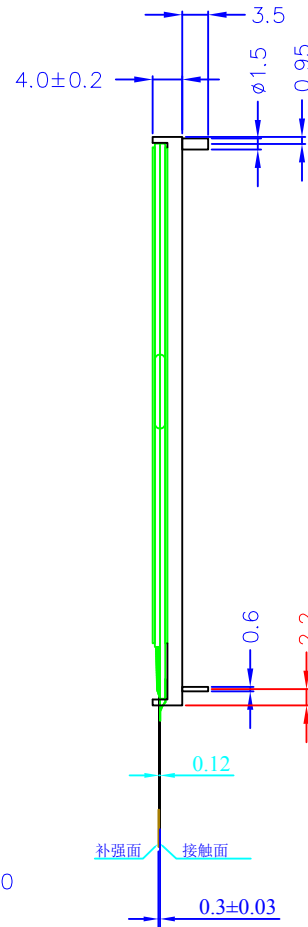

COM&SEG LAYOUT

PIN	SYMBOL
1	VG
2	V0
3	XV0
4	CAP
5	CAN
6	VDD
7	VSS
8	COM/CON
9	IF2
10	IF1
11	IF0
12	CS
13	RS
14	RD
15	WR
16	RST
17	D0
18	D1
19	D2
20	D3
21	D4
22	D5
23	D6
24	D7

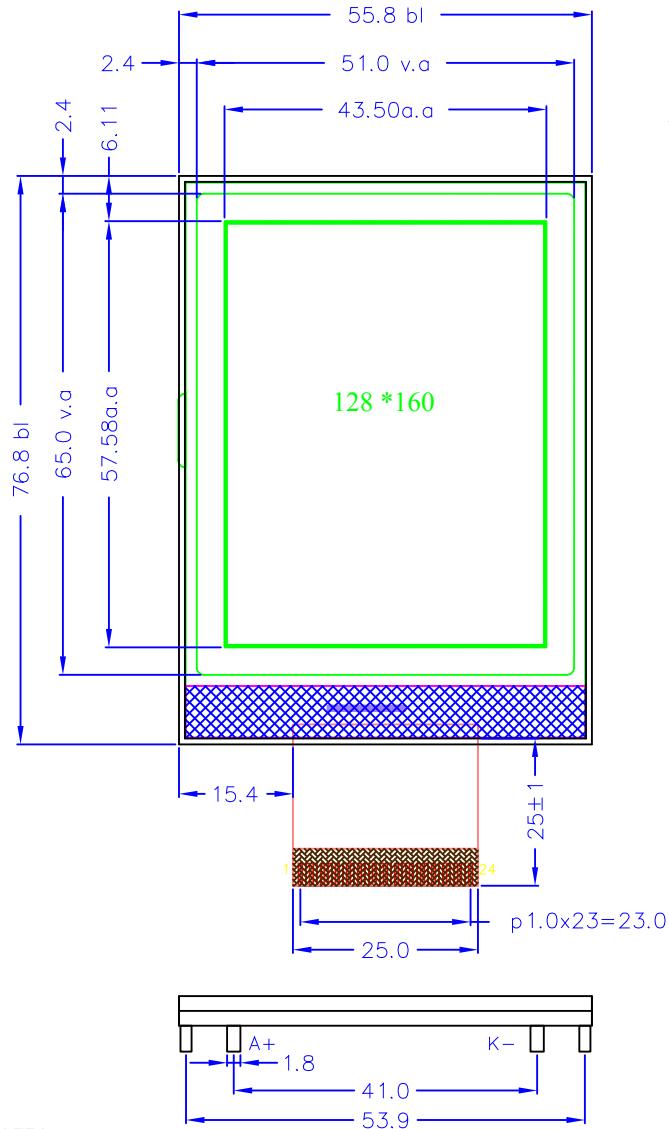

NOTES:

1. DISPLAY TYPE: STN,BLUE
2. POLARIZER TYPE: TRANSMISSIVE
3. VIEW DIRECTION: 6:00
4. OPERATING TEMPERATURE: $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$
5. STORAGE TEMPERATURE: $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$
6. VDD: +3.3V
7. DRIVE METHOD: 1/160DUTY,1/12BIAS
8. CONTROLLER: ST75256 or equivalent
9. BACKLIGHT TYPE: WHITE
10. BACKLIGHT SUPPLY VOLTAGE: +3.0V
11. VOP: TBD

 WAYING (HONGKONG) SHARES LIMITED		
DESIGN:	MODEL NUMBER:	UNITS: MM
CHECK:	WYM128160K28	VERSION: A
APPROVE:		SHEET: 1 OF 1
Unspecified tolerances are ± 0.3		DATE: 2016-09-10